


Oil Pattern Distance	46	Reverse Brush Drop	42	Oil Per Board	50 ul
Forward Oil Total	16.95 mL	Reverse Oil Total	11.65 mL	Volume Oil Total	28.6 mL
Tank Configuration	Only A	Tank A Conditioner	Your choice	Tank B Conditioner	Your choice

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	5	14	185	0.0	7.9	7.9	9250
2	10L	10R	2	22	42	7.9	14.1	6.2	2100
3	12L	12R	2	22	34	14.1	20.3	6.2	1700
4	13L	13R	2	22	30	20.3	26.5	6.2	1500
5	14L	14R	2	26	26	26.5	33.8	7.3	1300
6	15L	15R	2	26	22	33.8	41.1	7.3	1100
7	2L	2R	0	26	0	41.1	46.0	4.9	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	0	46.0	33.0	-13.0	0
2	15L	15R	2	22	22	33.0	26.8	-6.2	1100
3	14L	14R	1	22	13	26.8	23.7	-3.1	650
4	13L	13R	2	18	30	23.7	18.6	-5.1	1500
5	11L	11R	3	18	57	18.6	11.0	-7.6	2850
6	2L	2R	3	18	111	11.0	3.4	-7.6	5550
7	2L	2R	0	14	0	3.4	0.0	-3.4	0

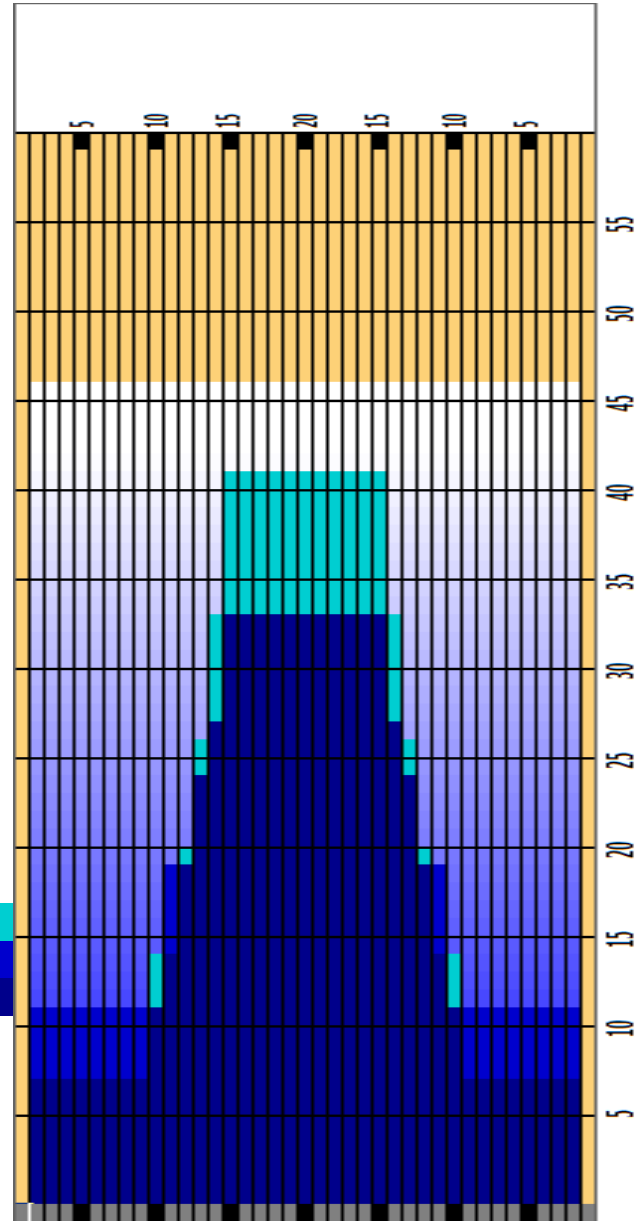

Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined



Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50
 Created by SWEBOWL TK 240702- For use in
 Swedish league 2024-25. Machines without db use
 db 46.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3.25	2.41	1.09	1.09	2.41	3.25

